



6571 Earth SW4 0.6/1 kV


EPR/ZH

BS 6883

Halogen-free, flame retardant, offshore & shipboard earth cables with elastomeric insulation and sheath

CONSTRUCTION

Conductors	Tinned annealed circular stranded copper class 2 acc. to BS EN 60228
Insulation	Halogen-free elastomer compound EPR type GP4 acc. to BS 7655-1.2
Outer sheath	Halogen-free, heat-resistant, oil-resisting and flame-retardant elastomer compound type SW4 acc. to BS 7655-2.6
Colour of outer sheath	Green/yellow
Cable marking	ELECTRIC CABLE Type SW4 "number of cores" "x" "conductor size" "600/1,000 V" "TFK3" "BS6883" "UK00A code" "IEC60332-3-22 cat. A" "year" "metre mark"

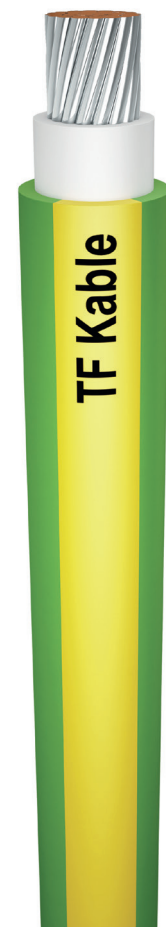

CHARACTERISTIC

Maximum conductor operating temperature:	+90°C	
Lowest ambient temperature for fixed installation:	-40°C	
Lowest installation temperature:	-15°C	
Minimum bending radius:	Overall diameter of cable (D)	Minimum bending radius
	≤ 10 mm	3 D
	16-25 mm	4 D
	> 25 mm	6 D
D – overall diameter of cable		

Fire performance

Flame retardant:	IEC 60332-3-22 Category A
Smoke emission:	BS EN 61034-2, IEC 61034-2
Corrosive gas emission:	BS EN 50267-2-1, IEC 60754-1: type SW4 cables ≤ 0.5% HCl

6571 Earth SW4 0.6/1 kV

EPR/ZH

BS 6883

Applications

Unarmoured earth cable for fixed installations in all areas, including accommodation and open deck in ships and offshore units.

Standard length cable packing:

1,000 m on drums

Other forms of packing and delivery are available on request

Number and cross-sectional area of conductor	Class of conductor	Nominal thickness of insulation	Nominal thickness of outersheath	Approximate overall diameter of cable	Approximate net weight of cables SW4	UKOOA Code
n × mm ²		mm	mm	mm	kg/km	
1 × 1	2	0.8	1.0	4.8	34	–
1 × 1.5	2	0.8	1.0	5.1	40	–
1 × 2.5	2	0.8	1.0	5.6	54	WE103
1 × 4	2	1.0	1.0	6.5	78	WE104
1 × 6	2	1.0	1.0	7.3	101	WE106
1 × 10	2	1.0	1.0	8.1	144	WE110
1 × 16	2	1.0	1.1	9.5	216	WE116
1 × 25	2	1.2	1.2	11.4	328	WE125
1 × 35	2	1.2	1.2	12.6	429	WE135
1 × 50	2	1.4	1.3	14.3	551	WE150
1 × 70	2	1.4	1.3	16.0	753	WE170
1 × 95	2	1.6	1.4	18.6	1,049	WE195
1 × 120	2	1.6	1.5	20.3	1,274	WE10A
1 × 150	2	1.8	1.6	22.5	1,568	WE10B
1 × 185	2	2.0	1.7	24.9	1,949	WE10C
1 × 240	2	2.2	1.8	28.0	2,530	WE10D
1 × 300	2	2.4	1.9	30.9	3,134	WE10E
1 × 400	2	2.6	2.0	34.6	4,258	WE10F
1 × 500	2	2.8	2.2	37.6	5,337	WE10G
1 × 630	2	2.8	2.3	42.9	6,533	WE10H

Please refer to technical section for additional information relating to these cables.

The information contained in this document, including the tables and drawings, are provided for illustrative purposes only and not a commercial offer; nor may it constitute the basis for pursuing any claim against TELE-FONIKA KABLE SA. The suitability of any product including properties, should be made by a qualified person; having already gained the appropriate permissions and documentation, to ensure compliance with any applicable law or regulation.